


AUX64..RIDOTTO - NIPPLO ESAG. RIDOTTO M/M GAS CON X NPT

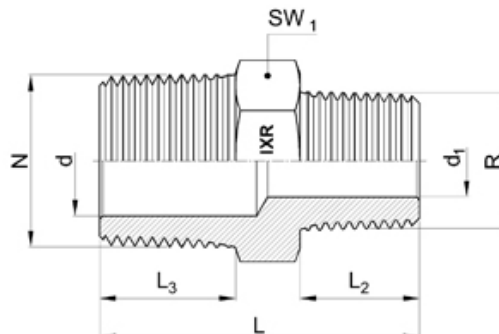

Descrizione:

Filettatura 1: Gas Conica UNI EN 10226 : 2006 (Ex UNI / ISO 7/1)

Filettatura 2: NPT- ASME B.1.20.2M-2006

Vedi anche codice AUX64..

Caratteristiche tecniche:

Codice di ordinazione	R	N	L	L2	L3	d	d1	SW1
AUX64-1814	1/8"	1/4"	30.5	9.5	15	6	4	17
AUX64-1418	1/4"	1/8"	29.5	13.5	10	4	6	17
AUX64-1438	1/4"	3/8"	37.5	13.5	16	8	6	19
AUX64-1412	1/4"	1/2"	41.5	13.5	20	11.1	6	22
AUX64-3818	3/8"	1/8"	32	14	10	4	8	19
AUX64-3814	3/8"	1/4"	37	14	15	6	8	19
AUX64-3812	3/8"	1/2"	42	14	20	11.1	8	22
AUX64-3834	3/8"	3/4"	45	14	21	17	8	27
AUX64-1214	1/2"	1/4"	41.5	18.5	15	6	11.1	22
AUX64-1238	1/2"	3/8"	42.5	18.5	16	8	11.1	22
AUX64-1234	1/2"	3/4"	49.5	18.5	21	17	11.1	27
AUX64-1211	1/2"	1"	54.5	18.5	25	22.5	11.1	36
AUX64-3414	3/4"	1/4"	44	19	15	6	17	27
AUX64-3438	3/4"	3/8"	45	19	16	8	17	27
AUX64-3412	3/4"	1/2"	49	19	20	11.1	17	27
AUX64-3411	3/4"	1"	55	19	25	22.5	17	36
AUX64-1112	1"	1/2"	53	22	20	11.1	22.5	36
AUX64-1134	1"	3/4"	54	22	21	17	22.5	36
AUX64-1154	1"	1.1/4"	62	22	26	28.6	22.5	46
AUX64-5411	1.1/4"	1"	63	24	25	22.5	28.6	46
AUX64-5432	1.1/4"	1.1/2"	66	24	26	33.3	28.6	50
AUX64-5442	1.1/4"	2"	68	24	27	46	28.6	65
AUX64-3211	1.1/2"	1"	66	25	25	22.5	33.3	50
AUX64-3254	1.1/2"	1.1/4"	67	25	26	28.6	33.3	50
AUX64-3242	1.1/2"	2"	69	25	27	46	33.3	65