


## AUX25..RIDOTTO - NIPPLO ESAG. RID. M/M GAS CIL - 60°

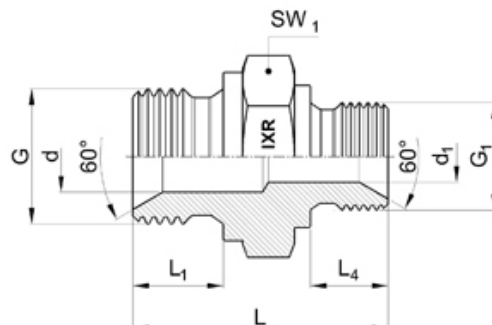

### Descrizione:

**Riferimento:** ISO 8434-6 / BS 5200

**Filettatura:** Gas Cilindrica UNI/ISO 228

**Attacchi:** Maschio a sede conica e tenuta con guidarondella e bonded seal

*Vedi anche codice AUX25..*

### Caratteristiche tecniche:

| Codice di ordinazione | G      | G1     | L    | L1 | L4 | d    | d1   | SW1 |
|-----------------------|--------|--------|------|----|----|------|------|-----|
| AUX2502               | 1/4"   | 1/8"   | 28.5 | 11 | 8  | 6    | 4    | 19  |
| AUX2504               | 3/8"   | 1/4"   | 34.5 | 12 | 11 | 8    | 6    | 22  |
| AUX2506               | 1/2"   | 3/8"   | 39.5 | 14 | 12 | 11.1 | 8    | 27  |
| AUX2508               | 3/4"   | 1/2"   | 45   | 16 | 14 | 17   | 11.1 | 32  |
| AUX2510               | 1"     | 3/4"   | 50   | 19 | 16 | 22.5 | 17   | 41  |
| AUX2512               | 1.1/4" | 1"     | 57   | 20 | 19 | 28.6 | 22.5 | 50  |
| AUX2514               | 1.1/2" | 1.1/4" | 60   | 22 | 20 | 33.3 | 28.6 | 55  |
| AUX2516               | 2"     | 1.1/2" | 66.5 | 25 | 22 | 46   | 33.3 | 70  |
| AUX2518               | 1/2"   | 1/4"   | 38   | 14 | 11 | 11.1 | 6    | 27  |
| AUX2519               | 1"     | 1/2"   | 48   | 19 | 14 | 22.5 | 11.1 | 41  |
| AUX2520               | 3/4"   | 3/8"   | 42.5 | 16 | 12 | 17   | 8    | 32  |
| AUX2521               | 1.1/4" | 3/4"   | 54   | 20 | 16 | 28.6 | 17   | 50  |
| AUX2522               | 2"     | 1"     | 63.5 | 25 | 19 | 46   | 22.5 | 70  |
| AUX2523               | 1"     | 3/8"   | 45.5 | 19 | 12 | 22.5 | 8    | 41  |
| AUX2524               | 3/8"   | 1/8"   | 31   | 12 | 8  | 8    | 4    | 22  |
| AUX2530               | 1.1/2" | 3/4"   | 56   | 22 | 16 | 33.3 | 17   | 55  |
| AUX2531               | 1.1/2" | 1"     | 59   | 22 | 19 | 33.3 | 22.5 | 55  |
| AUX2532               | 2"     | 1.1/4" | 64.5 | 25 | 20 | 46   | 28.6 | 70  |
| AUX2533               | 3/4"   | 1/4"   | 41   | 16 | 11 | 17   | 6    | 32  |