


## AUX73.. - RIDUZIONE ESAG. M/F GAS CONICO X NPT

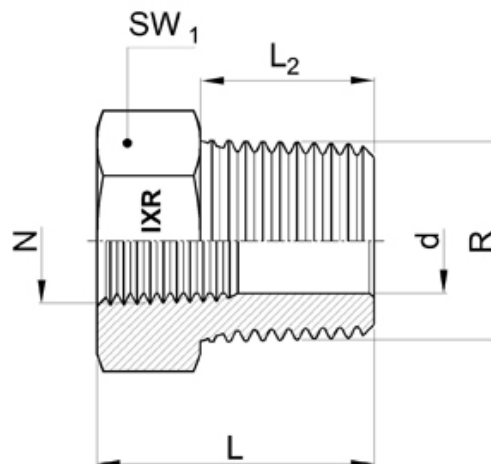

### Descrizione:

**Attacchi:** Maschio/Femmina

**Filettatura 1:** Gas Conica UNI EN 10226 : 2006 ( Ex UNI / ISO 7/1)

**Filettatura 2:** NPT- ASME B.1.20.2M-2006

### Caratteristiche tecniche:

Codice di ordinazione	R	N	L	L2	d	SW1
AUX73-1818	1/8"	1/8"	23.5	9.5	4	14
AUX73-1814	1/8"	1/4"	32	9.5	4	19
AUX73-1838	1/8"	3/8"	32.5	9.5	4	24
AUX73-1812	1/8"	1/2"	39	9.5	4	27
AUX73-1418	1/4"	1/8"	28	14	7	14
AUX73-1414	1/4"	1/4"	35	14	7	19
AUX73-1438	1/4"	3/8"	37	14	7	24
AUX73-1412	1/4"	1/2"	43.5	14	7	27
AUX73-3814	3/8"	1/4"	34	14	8	22
AUX73-3838	3/8"	3/8"	37	14	8	24
AUX73-1214	1/2"	1/4"	29.5	18.5	11.1	24
AUX73-1238	1/2"	3/8"	36.5	18.5	11.1	24
AUX73-1212	1/2"	1/2"	48	18.5	11.1	27
AUX73-3414	3/4"	1/4"	30	19	11.1	27
AUX73-3412	3/4"	1/2"	46	19	18	32
AUX73-3434	3/4"	3/4"	48	19	17	36
AUX73-1112	1"	1/2"	33	22	18	36
AUX73-1134	1"	3/4"	33	22	22	36
AUX73-1111	1"	1"	57	22	22.5	41
AUX73-5411	1.1/4"	1"	38	24	29.2	46