


AUX63.. - PROLUNGA ESAGONALE M/F GAS CIL - 60°

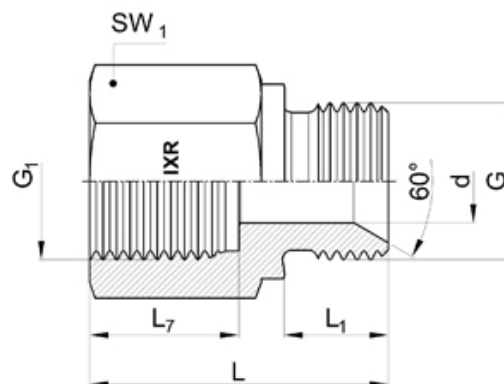

Descrizione:

Riferimento: ISO 8434-6 / BS 5200

Attacchi : Maschio Sede
Conica/Femmina

Filettatura : Gas Cilindrica UNI/ISO
228

Caratteristiche tecniche:

Codice di ordinazione	G	G1	L	L1	L7	d	SW1	PN	MPa
AUX63-18-25	1/8	1/8	25	8	10	4	17	689	68.9
AUX63-18-45	1/8	1/8	45	8	10	4	17	689	68.9
AUX63-14-35	1/4	1/4	35	12	15	6	19	410	41
AUX63-14-75	1/4	1/4	75	12	15	6	19	410	41
AUX63-38-36	3/8	3/8	36	12	17	9	24	410	41
AUX63-38-75	3/8	3/8	75	12	17	9	24	410	41
AUX63-12-40	1/2	1/2	40	14	20	12	27	410	41
AUX63-12-75	1/2	1/2	75	14	20	12	27	410	41
AUX63-34-45	3/4	3/4	45	16	22	16.7	36	410	41
AUX63-11-50	1	1	50	19	22	22	41	410	41
AUX63-54-58	1.1/4	1.1/4	58	20	27	28.6	50	200	20
AUX63-32-60	1.1/2	1.1/2	60	22	25.5	35	55	200	20
AUX63-42-65	2	2	65	25	28	46	70	200	20